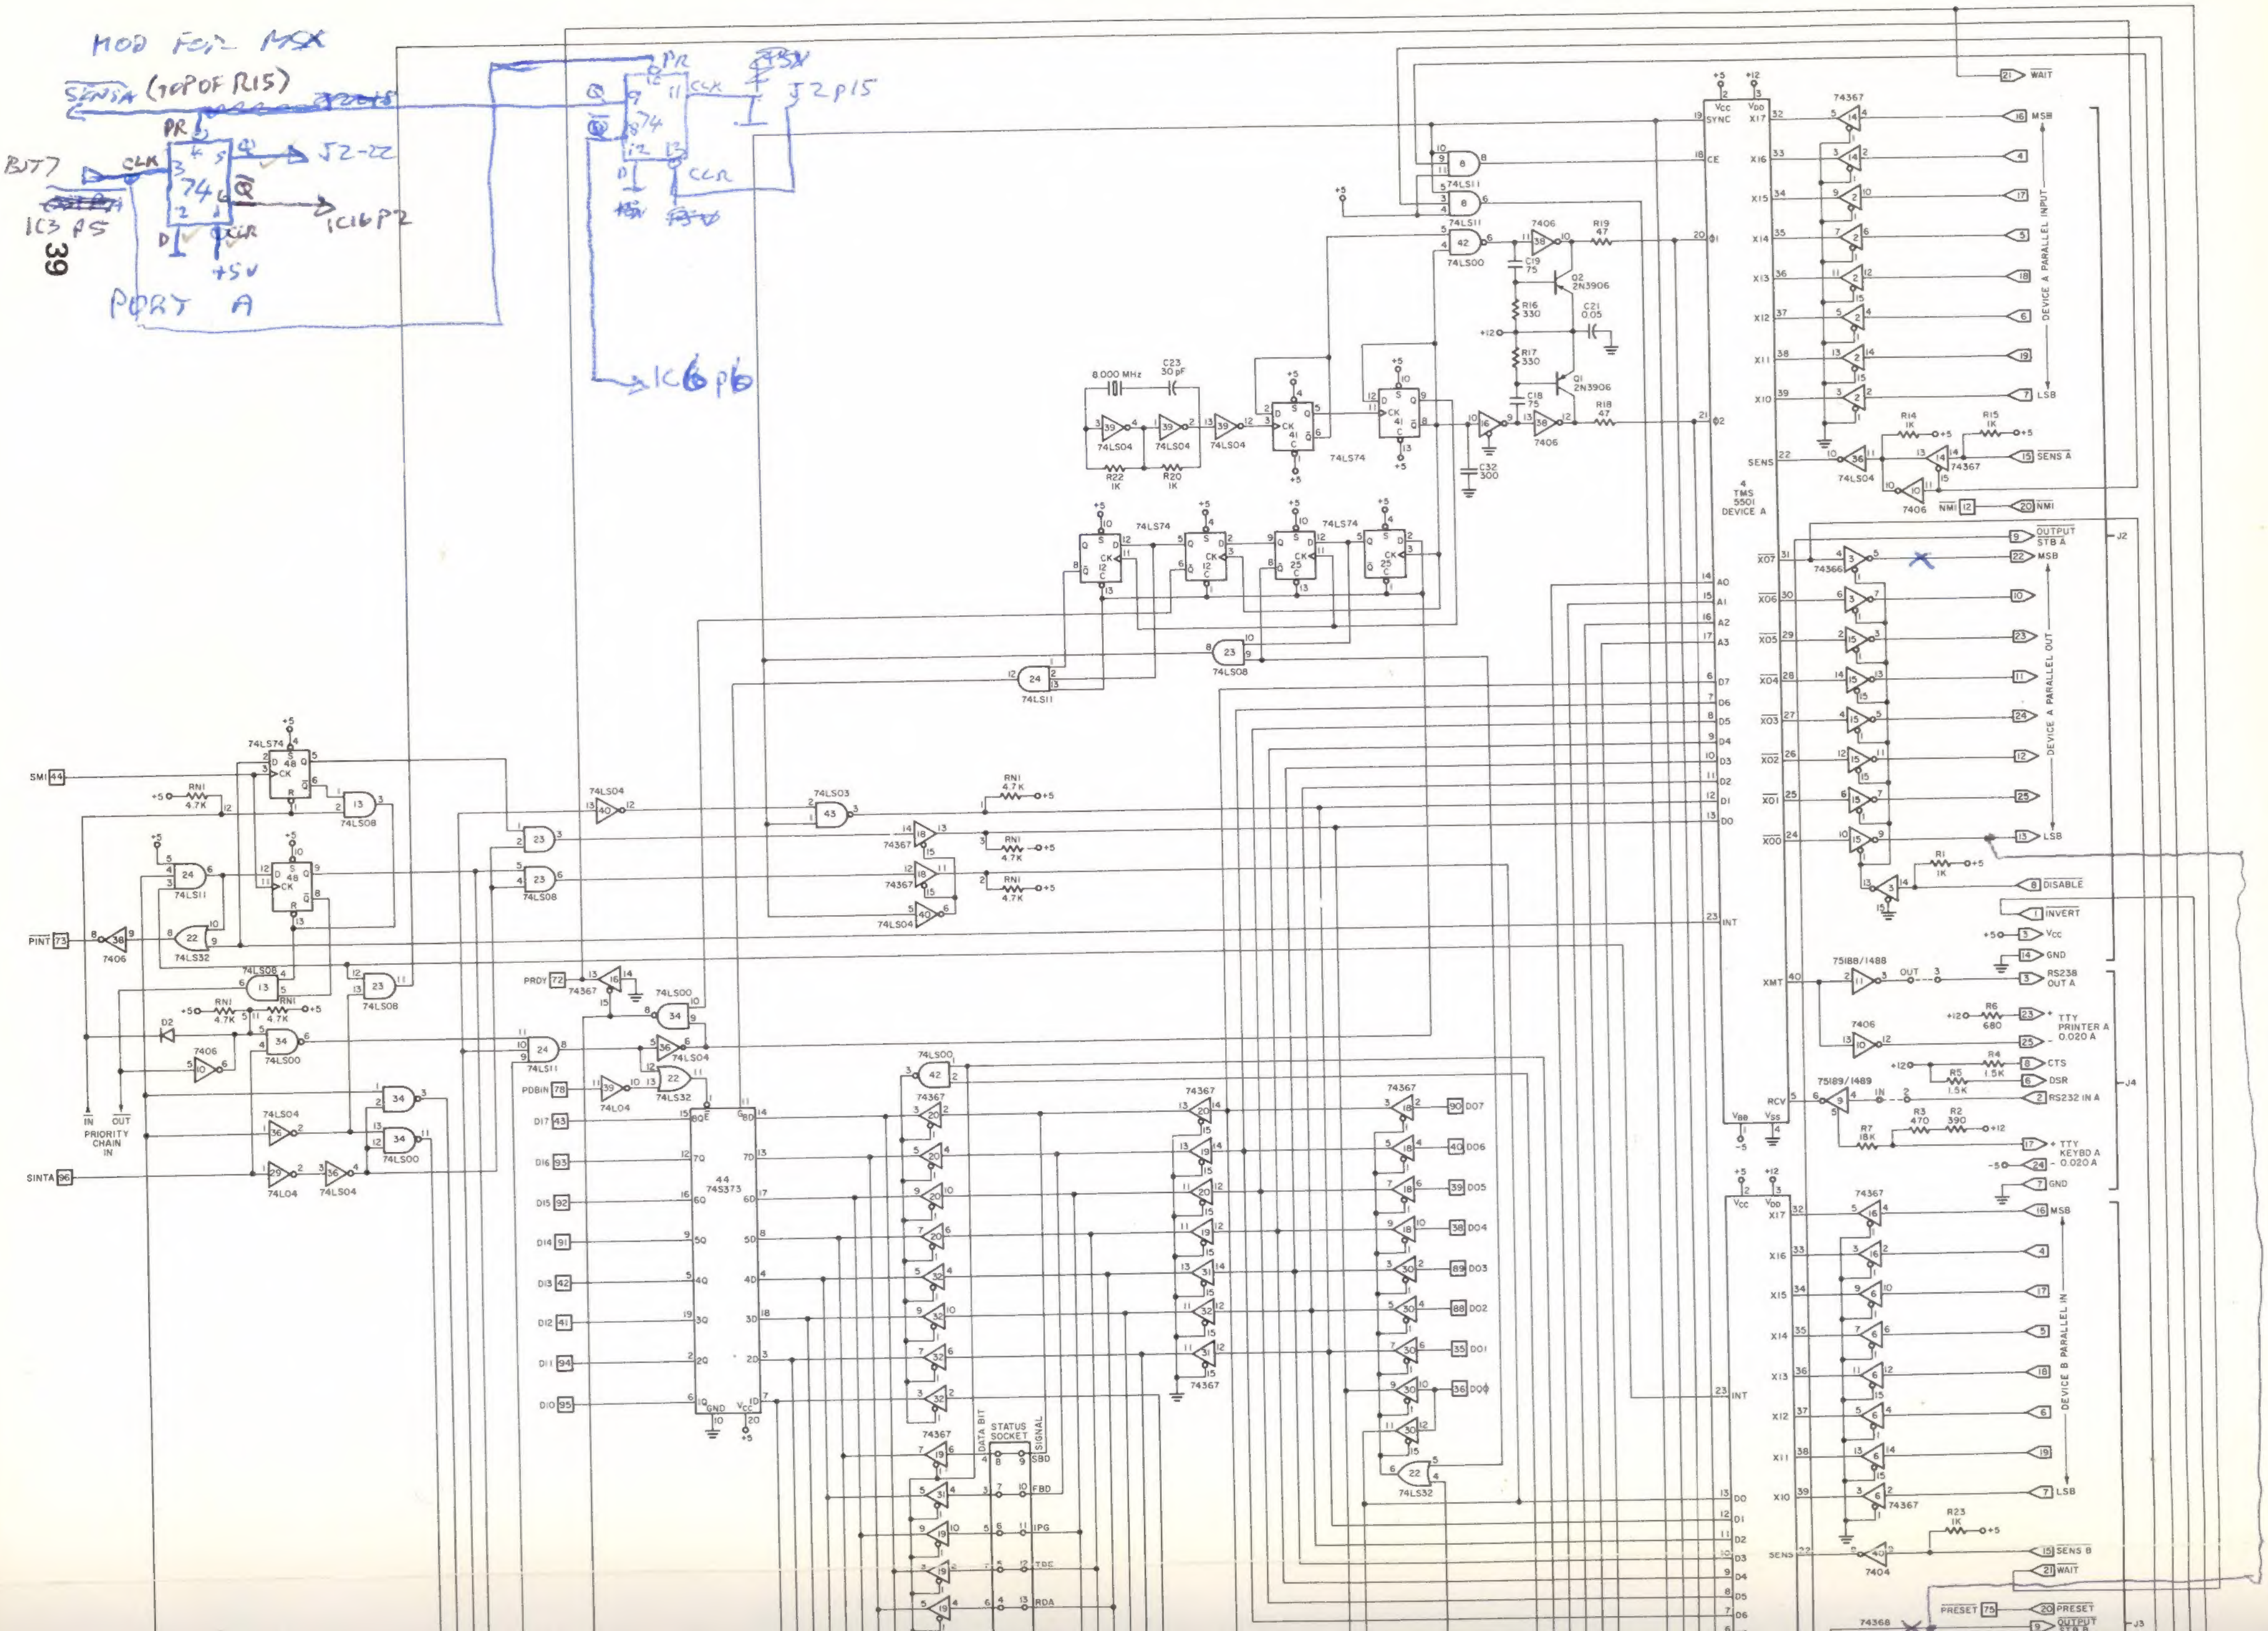
MOD FOR MSX
SENSA (TOP OF R15)
BIT7
IC3 P5
IC16 P2
J2-22
J2 P15
IC6 P6
PORT A
39
8.000 MHz
TMS 5501 DEVICE A
DEVICE A PARALLEL INPUT
DEVICE A PARALLEL OUT
DEVICE B PARALLEL IN
WAIT
MSB
LSB
SENS A
NMI
OUTPUT STB A
DISABLE
INVERT
RS232 OUT A
TTY PRINTER A 0.020 A
CTS
DSR
RS232 IN A
TTY KEYBD A 0.020 A
SENS B
PRESET
SMI
PINT
PRDY
PDBIN
SINTA
IN OUT PRIORITY CHAIN IN
DATA BIT
STATUS SOCKET
SIGNAL
44 74S373
DO7
DO6
DO5
DO4
DO3
DO2
DO1
DO0
DI7
DI6
DI5
DI4
DI3
DI2
DI1
DI0

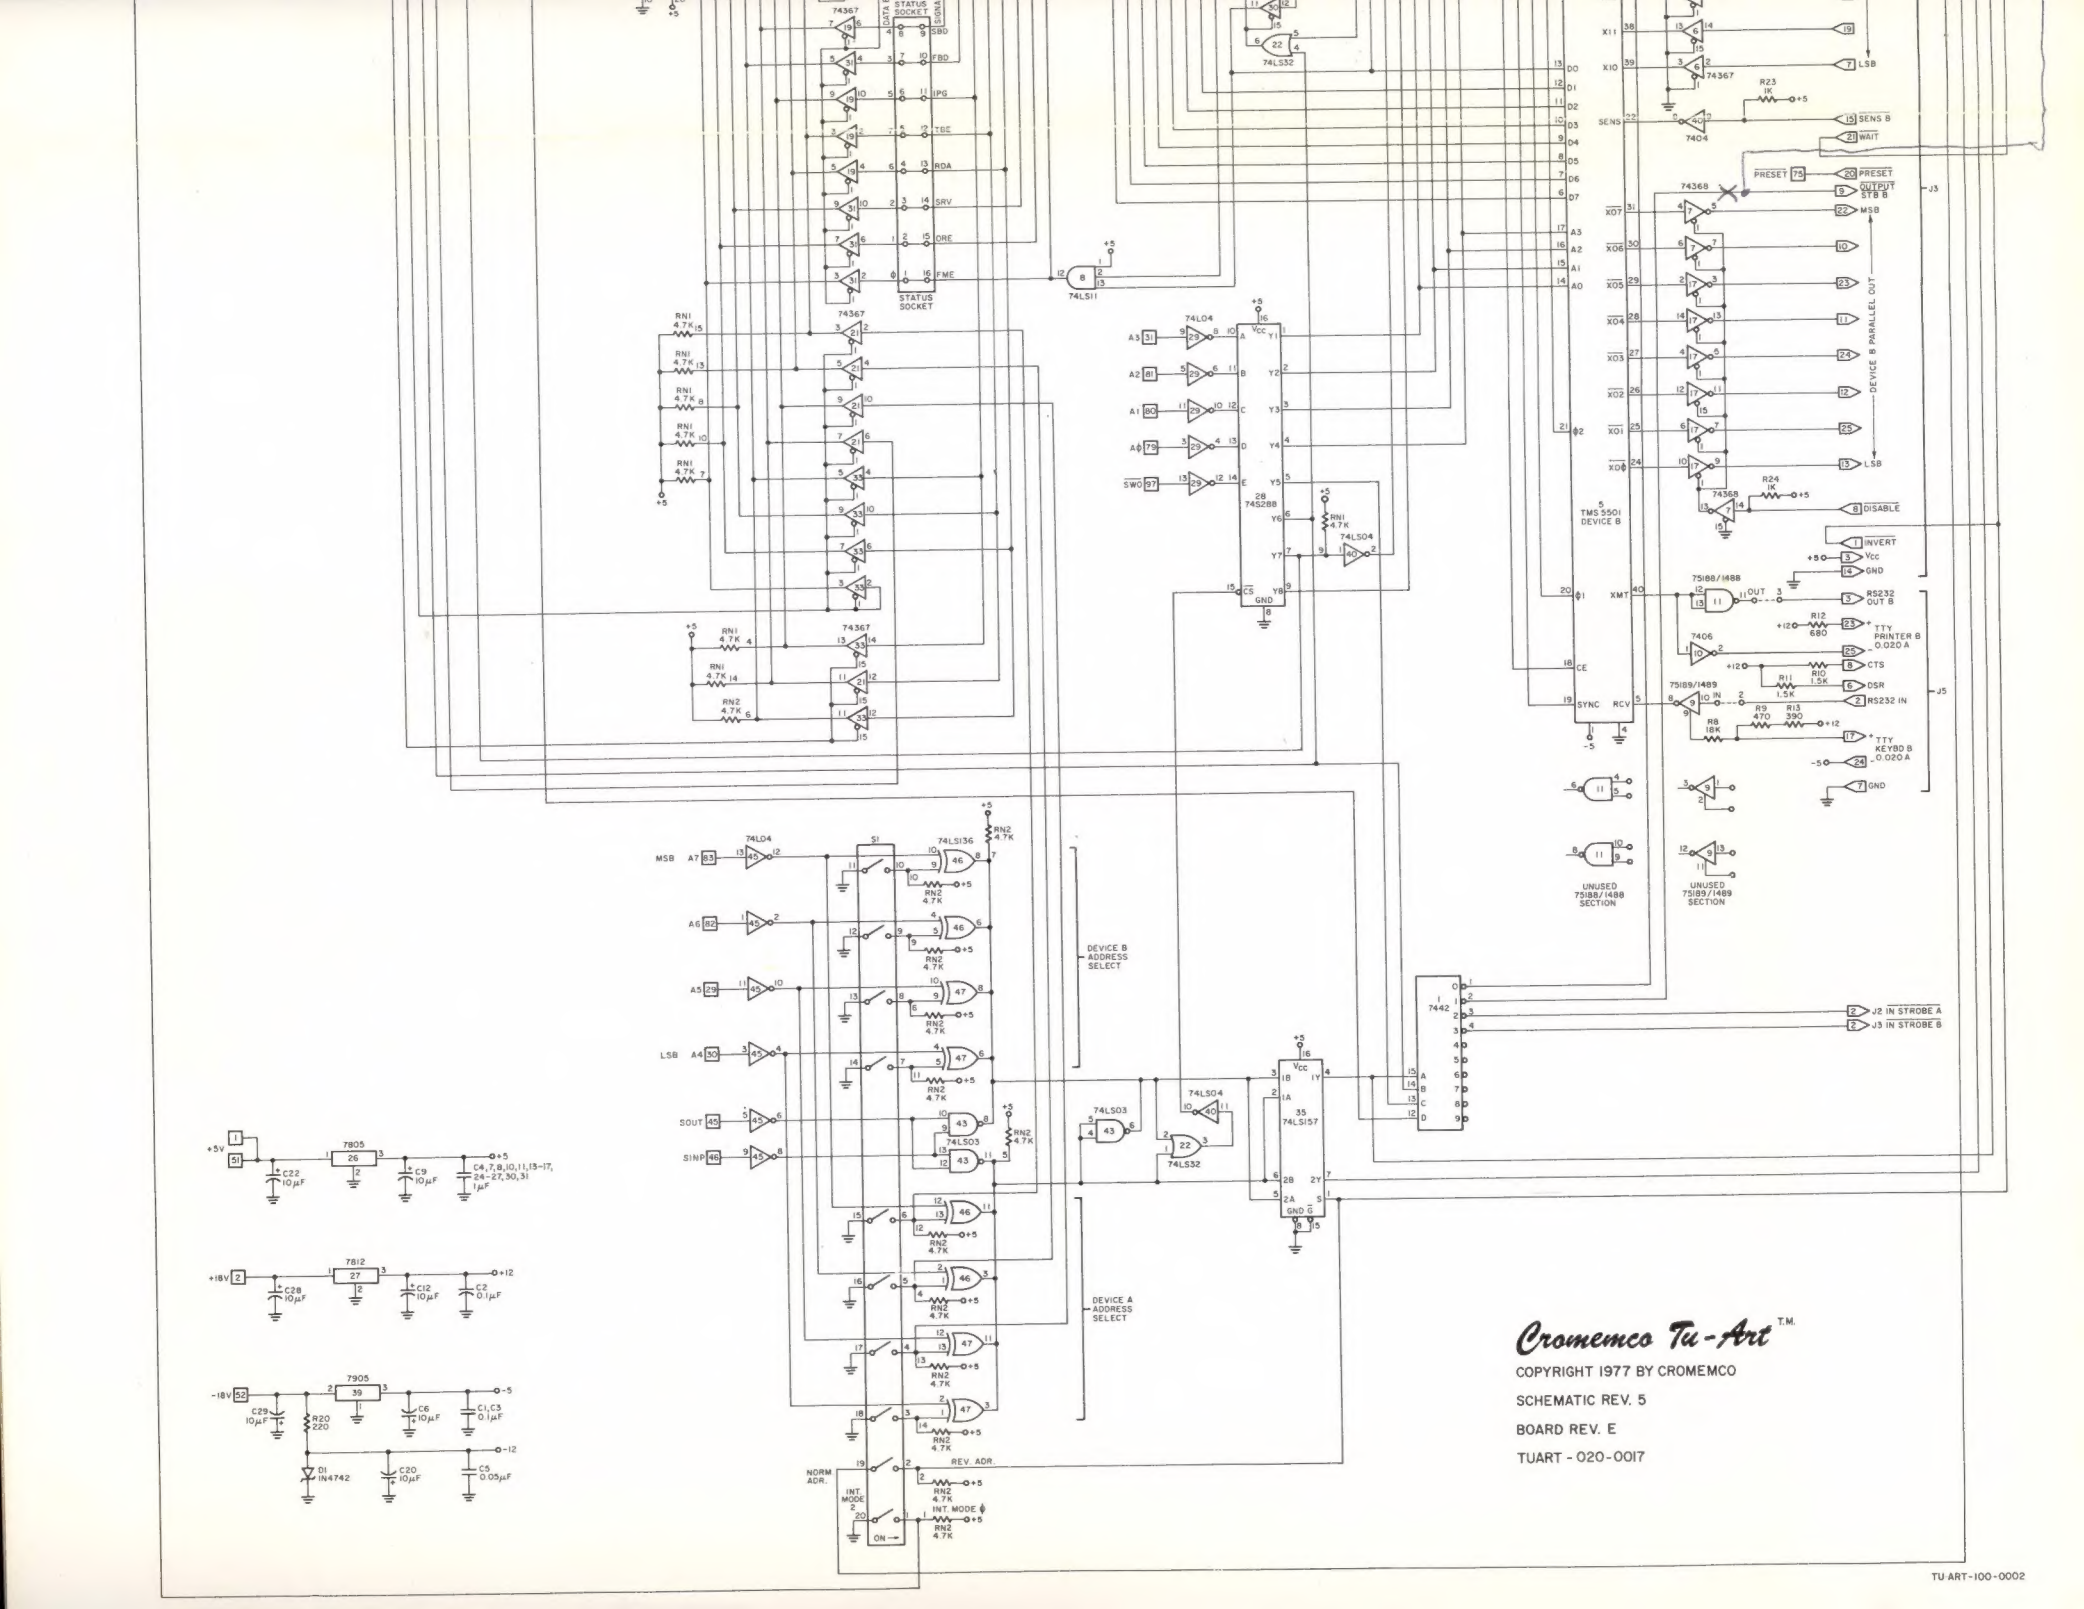

Cromemco Tu-Art™

COPYRIGHT 1977 BY CROMEMCO

SCHEMATIC REV. 5

BOARD REV. E

TUART - 020-0017